D.BIANCO

www.dbianco.com.au
email: info@dbianco.com.au

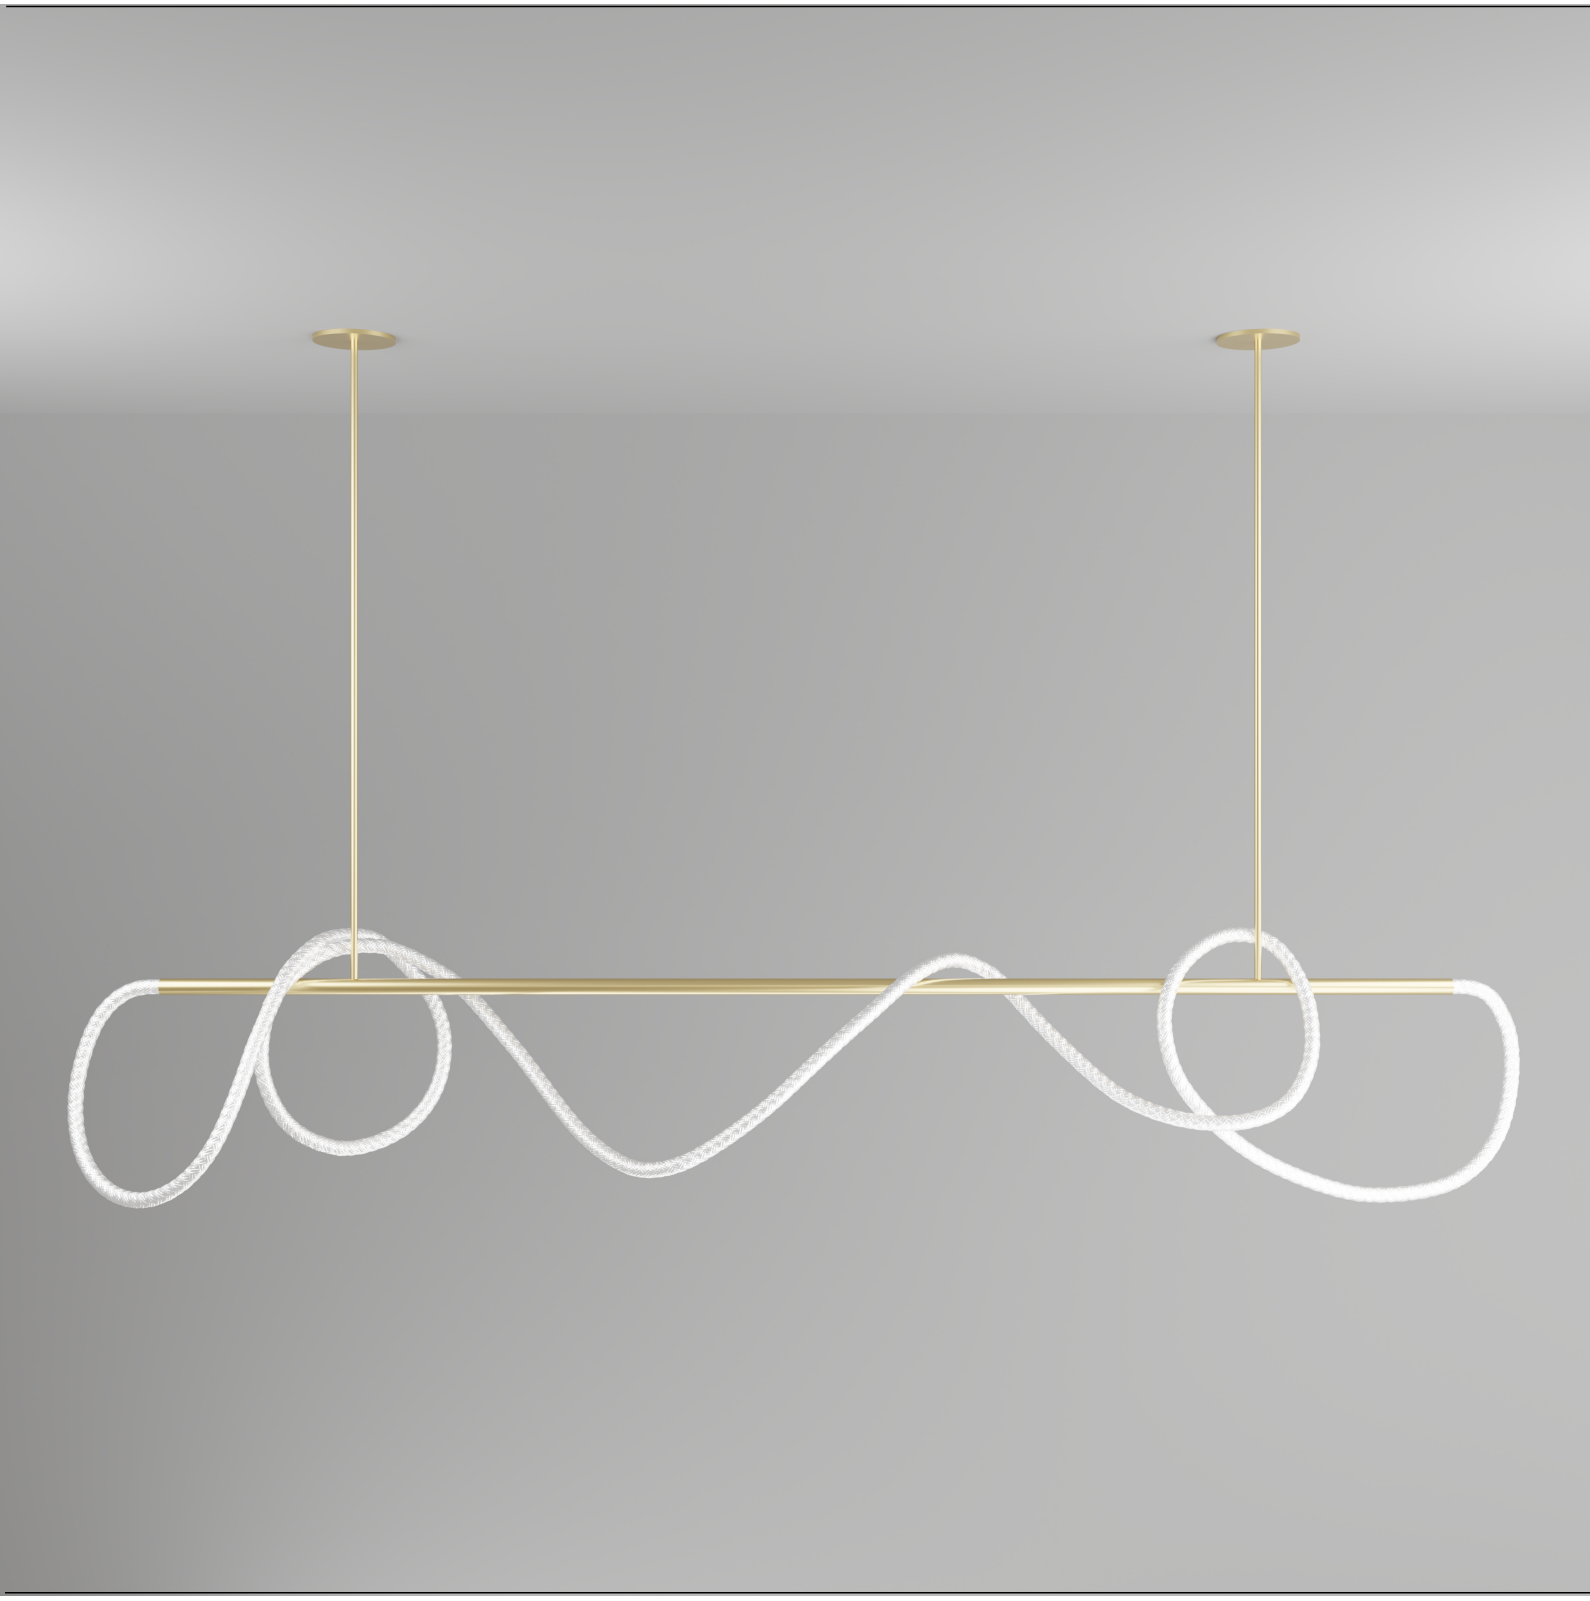

Festif Linear 2000

Festif Linear 2000

REQUIREMENTS

• Low Voltage (24VDC) – Do not wire directly to mains power
• Must be installed with the supplied remote driver
• Must be installed with junction boxes or strong support (junction box is not included)
• Cut-out hole 100-115 mm (varies with junction box size)
• Installation must be carried out by a licensed electrician

APPLICATIONS

• Indoor use only

• Suitable for living room, dining table, bar, kitchen island, entryway, hotels, and restaurants

TYPE OF LIGHTING

Ambient and task lighting (depending on installation height and LED colour)

MATERIALS

Solid brass, braided fabric cover over flexible LEDs

METAL FINISHES

Brushed Australian Brass, Satin Chrome, Brushed Copper, Satin Nickel, Satin Bronze Dark, Satin Bronze Medium

WARRANTY

- 4 years (residential)
- 2 years (commercial)

DESIGN & MANUFACTURE

Designed and made in Sydney, Australia by D.Bianco

TECHNICAL DATA

- IP Rating: IP20
- CRI: 98
- Lumen Output: 1800 lm per metre
- Dimmable: Yes (DALI, Triac)
- LED Replaceable: Yes
- Voltage: 24 VDC
- Wattage: 15 W per metre
- LED Colour Options: 2700 K, 3000 K, 4000 K
- Drivers: 100 W (per 5 metre) – Included
- Driver Dimensions: approx 190 × 50 × 30 mm
- LED Lifespan: 50,000 hours
- Certifications: AS/NZS 60598.2, 3820, 61347, 4879, 3000; EN IEC 60598-2-1; UL 1598 / CSA C22.2 No. 250.0 / ANCE NMX J 307/1

Festif Linear 2000

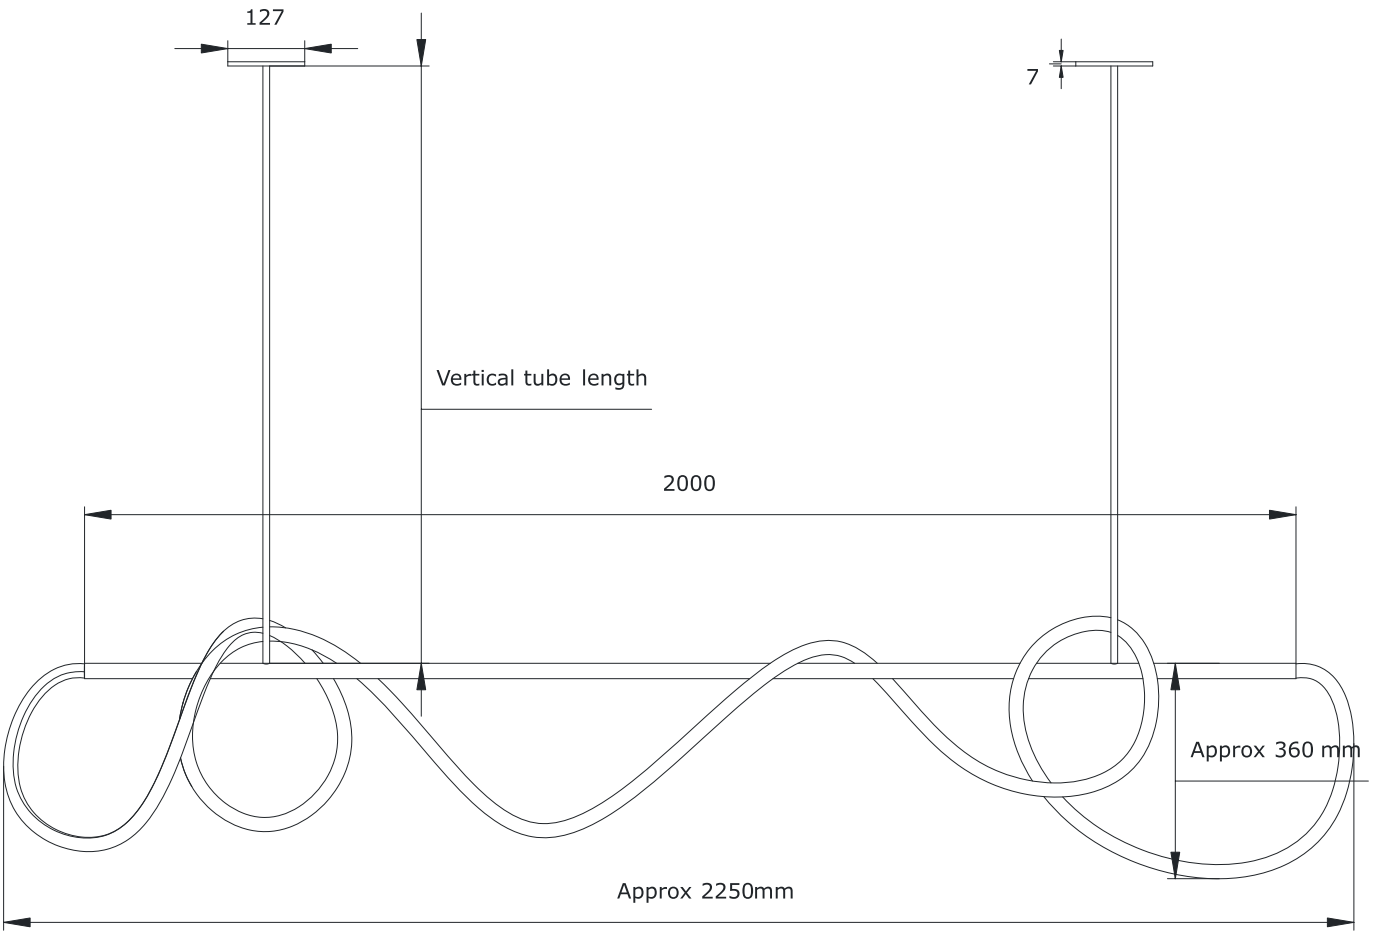

NOTE: The overall length and drop are approximate and may vary with the design arrangement of the braided LED rope.