


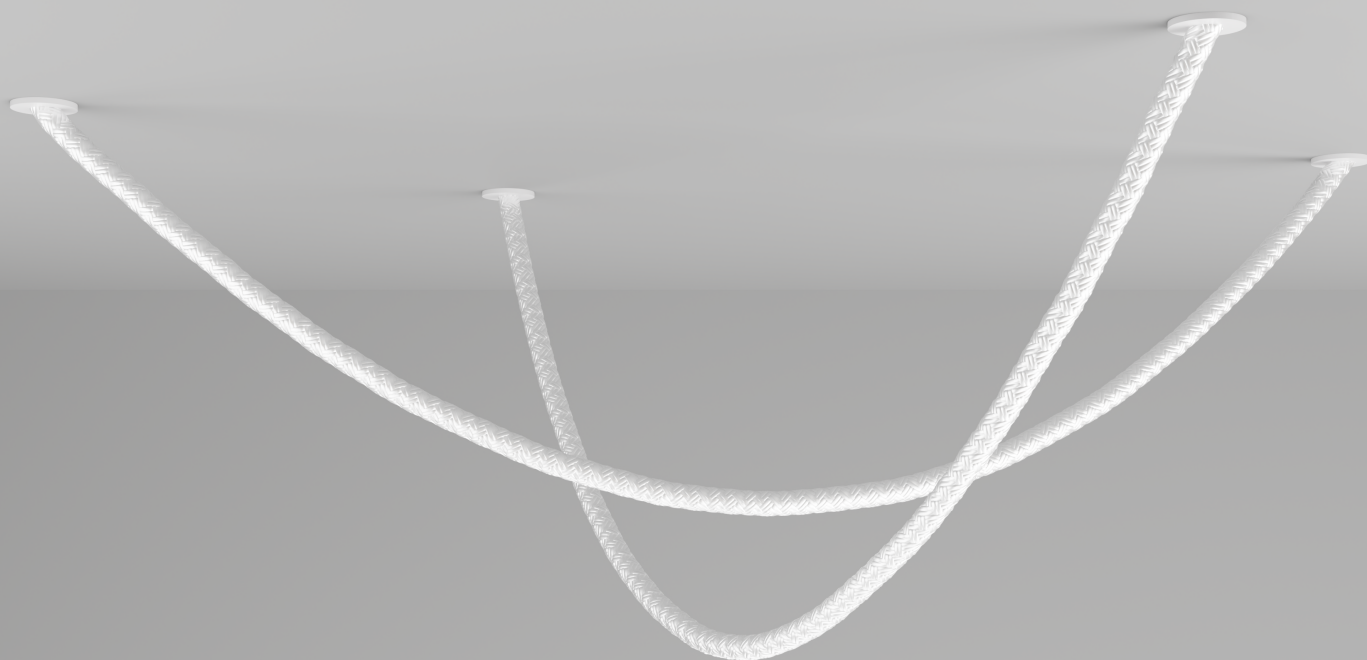

Nestlight A4.2

REQUIREMENTS

- Low Voltage (24VDC) – Do not wire directly to mains power
- Must be installed with the supplied remote driver
- Installation must be carried out by a licensed electrician
- Not compatible with junction boxes
- Cut-out hole size: 48 mm

APPLICATIONS

- Indoor use only
- Suitable for living room, dining table, bar, kitchen island, entryway, hotels, and restaurants

TYPE OF LIGHTING

Ambient and task lighting (depending on installation height)

MATERIALS

Solid brass, braided fabric cover over flexible LEDs

METAL FINISHES

Natural Brass, Brass H59, Satin Chrome, Brushed Copper, Satin Nickel, Satin Bronze Dark, White Coating

WARRANTY

- 4 years (residential)
- 2 years (commercial)

DESIGN & MANUFACTURE

Designed and made in Sydney, Australia by D.Bianco

- IP Rating: IP20
- CRI: 98
- Lumen Output: 1800 lm per metre
- Dimmable: Yes (DALI, Triac)
- LED Replaceable: Yes
- Voltage: 24 VDC
- Wattage: 15 W per metre
- LED Colour Options: 2700 K, 3000 K, 4000 K
- Drivers: 100 W (per 5 m) – Included
- Driver Dimensions: approx 190 × 50 × 30 mm
- LED Lifespan: 50,000 hours
- Certifications: AS/NZS 60598.2, 3820, 61347, 4879, 3000; EN IEC 60598-2-1; UL 1598 / CSA C22.2 No. 250.0 / ANCE NMX J 307/1

